


WPM ZD-18 Cleaning Guide



Loosen all three hopper lock screw

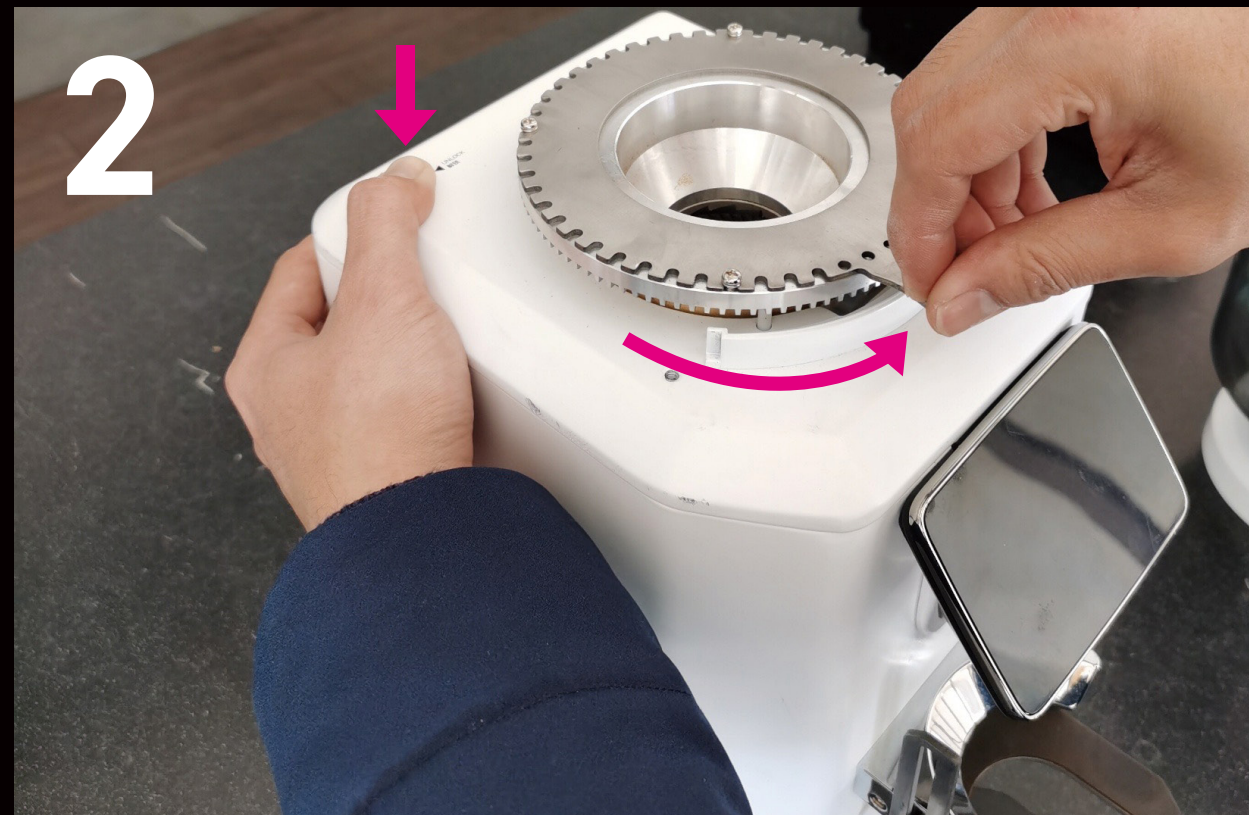


Press the grinding safety switch and turn the upper burr counterclockwise several times until it is released




Clean the upper burr.



Clean the lower burr.

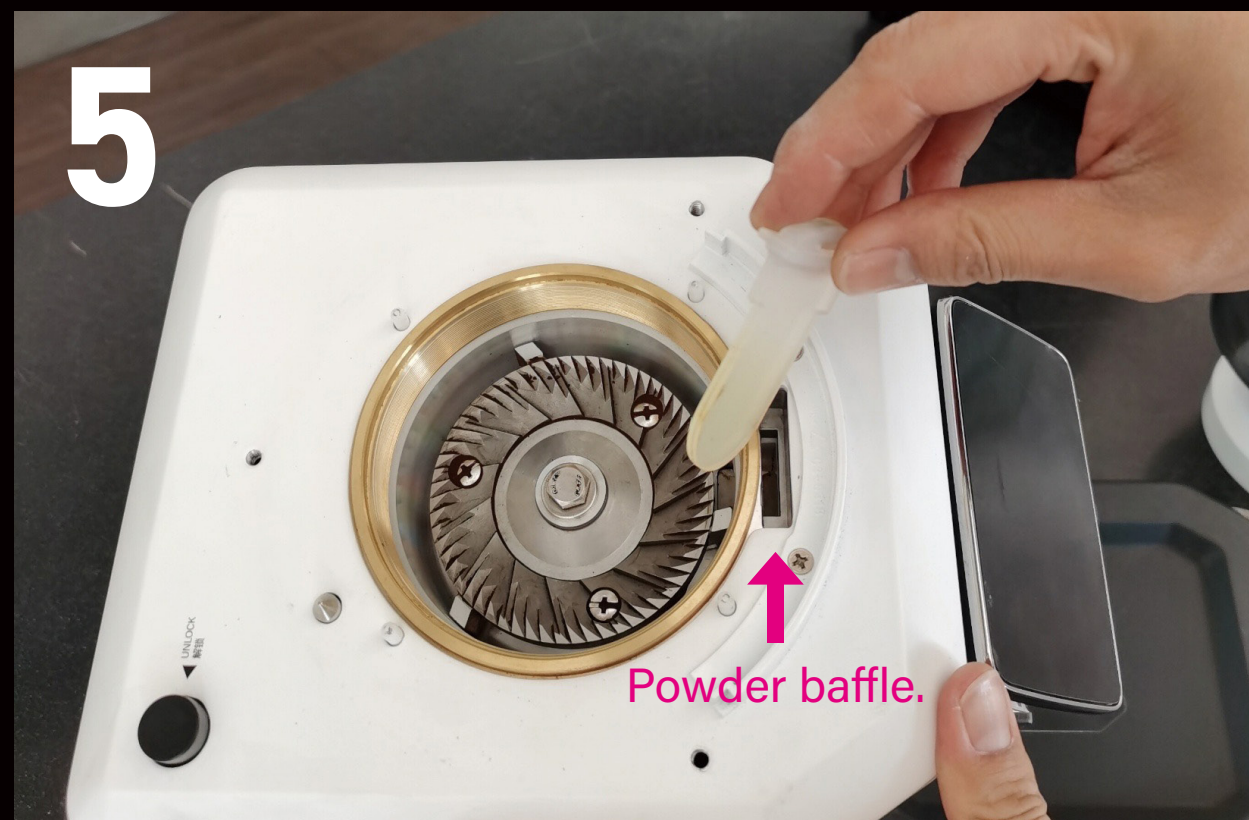

Pull out and clean the powder baffle.
Remove the grind outlet, clean and install it back.

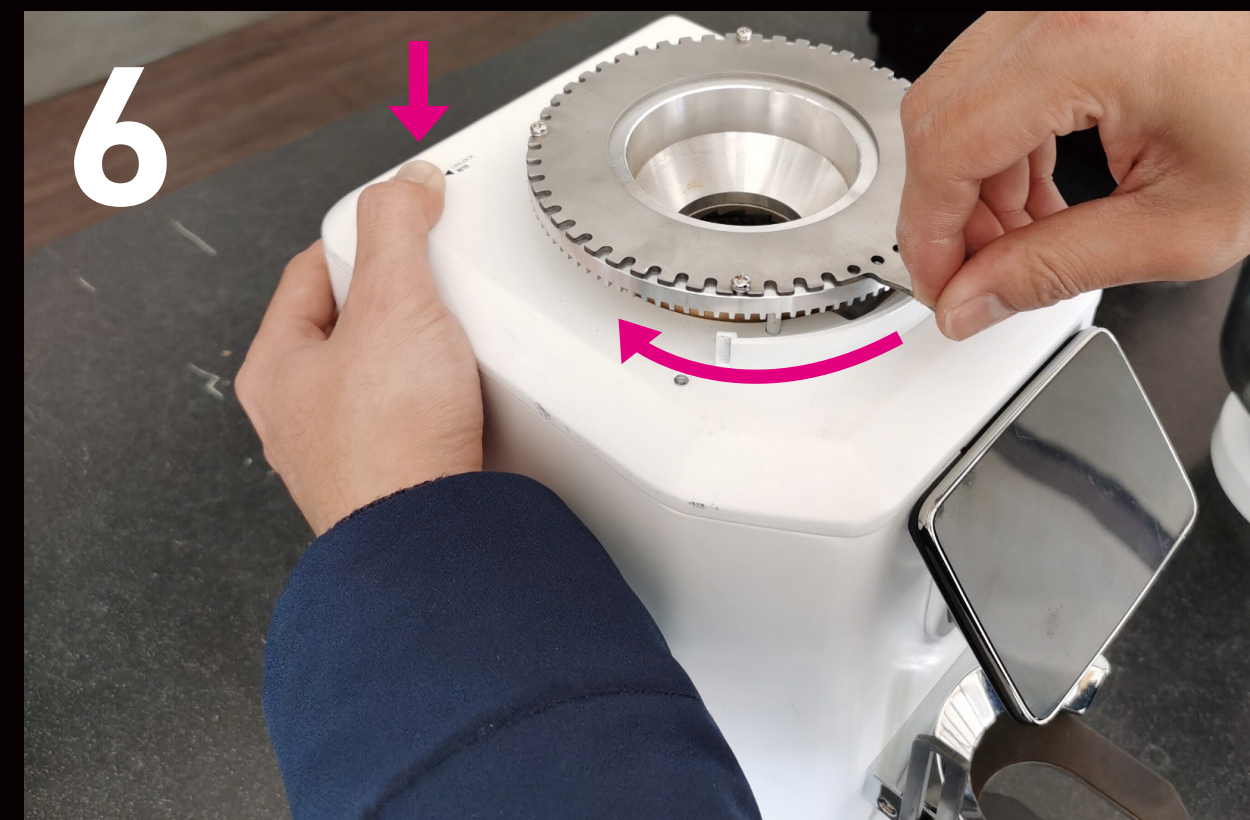

After these parts are cleaned, connect the threads of the upper burr and the lower burr , hold press the grinding adjustment unlock. Turn the upper burr clockwise to tighten, then turn it counterclockwise to 6 o'clock.

ZD-18 Grinding Adjustment Tips

1. If the amount of coffee beans in the hopper is higher than the hopper line (as shown in the figure below), you can directly adjust the thickness.
2. If the amount of coffee beans in the hopper is lower than the hopper line, you need to add coffee beans until above the hopper line before adjusting.
3. After adding coffee beans, adjust the grinding scale to more coarse first. (Otherwise, the coffee bean pressure will easily cause the grinding to be too fine)
4. Adjust to the appropriate thickness.

